

# SUNNY TRIPOWER 5000TL – 12000TL



STP 5000TL-20 / STP 6000TL-20 / STP 7000TL-20 / STP 8000TL-20 / STP 9000TL-20 / STP 10000TL-20 / STP 12000TL-20



gemeente  Berkelland

Behoort bij besluit van  
burgemeester en wethouders  
van Berkelland

datum: 17-11-2020

zaaknr: 85868

## Economical

- Maximum efficiency of 98.3 %
- Shade management with OptiTrac Global Peak
- Active temperature management with OptiCool

## Flexible

- DC input voltage of up to 1,000 V
- Integrated grid management functions
- Reactive power supply
- Module-tailored system design with Optiflex

## Communicative

- SMA Webconnect
- Sunny Portal communication
- SMA and SunSpec Modbus communication
- Simple country configuration
- Multifunction relay comes standard

## Easy-to-Use

- Three-phase feed-in
- Cable connection without tools
- SUNCLIX DC plug-in system
- Integrated ESS (Electronic Solar Switch)
- Easy wall mounting

## SUNNY TRIPOWER 5000TL – 12000TL

The Three-Phase Inverter – Not Only for Your Home...

...but also perfectly suited to the design of the traditional residential PV system up to the higher power outage range. After all, with the addition of the new 10 kVA and 12 kVA versions to the portfolio, the Sunny Tripower product range covers a broad spectrum of applications. Users benefit from numerous tried-and-tested product features. Highly flexible with its proven Optiflex technology and asymmetrical multistring, it delivers maximum yields with a top efficiency rating and OptiTrac Global Peak. In addition to SMA and SunSpec Modbus communication, it also comes standard with a direct Sunny Portal connection via SMA Webconnect. Other standard features include integrated grid management functions, reactive power supply and suitability for operation with a 30 mA RCD. In summary, when it comes to system design in the 5 kW to 12 kW power classes, the Sunny Tripower is the optimum product solution – for applications ranging from use in your own home and larger PV rooftop systems to implementation of smaller-scale PV farms.


# SUNNY TRIPOWER

## 5000TL / 6000TL / 7000TL / 8000TL / 9000TL / 10000TL / 12000TL

Technical Data	Sunny Tripower 5000TL	Sunny Tripower 6000TL
<b>Input (DC)</b>		
Max. generator power	9000 W <sub>p</sub>	9000 W <sub>p</sub>
Max. input voltage	1000 V	1000 V
MPP voltage range / rated input voltage	245 V to 800 V/580 V	295 V to 800 V/580 V
Min. input voltage / start input voltage	150 V / 188 V	150 V / 188 V
Max. input current input A / input B	11 A / 10 A	11 A / 10 A
Max. short-circuit current input A / input B	17 A / 15 A	17 A / 15 A
Number of independent MPP inputs / strings per MPP input	2 / A:2; B:2	2 / A:2; B:2
<b>Output (AC)</b>		
Rated power (at 230 V, 50 Hz)	5000 W	6000 W
Max. AC apparent power	5000 VA	6000 VA
Nominal AC voltage	3 / N / PE; 220 / 380 V 3 / N / PE; 230 / 400 V 3 / N / PE; 240 / 415 V	3 / N / PE; 220 / 380 V 3 / N / PE; 230 / 400 V 3 / N / PE; 240 / 415 V
Nominal AC voltage range	160 to 280 V	160 V to 280 V
AC grid frequency / range	50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz to +5 Hz
Rated power frequency / rated grid voltage	50 Hz / 230 V	50 Hz / 230 V
Max. output current	7.3 A	8.7 A
Power factor at rated power	1	1
Adjustable displacement power factor	0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited
Feed-in phases / connection phases	3 / 3	3 / 3
<b>Efficiency</b>		
Max. efficiency / European efficiency	98 % / 97.1 %	98 % / 97.4 %
<b>Protective devices</b>		
DC disconnect device	●	●
Ground fault monitoring / grid monitoring	● / ●	● / ●
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated	● / ● / -	● / ● / -
All-pole sensitive residual-current monitoring unit	●	●
Protection class (according to IEC 62103)/overvoltage category (according to IEC 60664-1)	I / III	I / III
<b>General data</b>		
Dimensions (W / H / D)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)
Weight	37 kg (81.6 lb)	37 kg (81.6 lb)
Operating temperature range	-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)
Noise emission (typical)	40 dB(A)	40 dB(A)
Self-consumption (at night)	1 W	1 W
Topology / cooling concept	Transformerless / Opticool	Transformerless / Opticool
Degree of protection (according to IEC 60529)	IP65	IP65
Climatic category (according to IEC 60721-3-4)	4K4H	4K4H
Maximum permissible value for relative humidity (non-condensing)	100 %	100 %
<b>Features</b>		
DC connection / AC connection	SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal
Display	Graphic	Graphic
Interface: RS485, Modbus, Speedwire / Webconnect	○ / ● / ●	○ / ● / ●
Multifunction relay / Power Control Module	● / ○	● / ○
Guarantee: 5 / 10 / 15 / 20 years	● / ○ / ○ / ○	● / ○ / ○ / ○
Certificates and permits (more available on request)	AS 4777.2:2015, CE, CEI 0-21:2016, C10/11:2012, DIN EN 62109-1, EN 50438 <sup>1</sup> , G59/3, G83/2, IEC 61727/MEA <sup>2</sup> , IEC 62109-2, NEN EN 50438, NRS 097-2-1, PPC, PPDS, RD 661/2007, RD 1699:2011, SI 4777, UTE C15-712-1, VDE0126-1-1, VDE AR-N 4105, VFR 2013, VFR 2014	
Type designation	STP 5000TL-20	STP 6000TL-20

Sunny Tripower 7000TL	Sunny Tripower 8000TL	Sunny Tripower 9000TL
13500 W <sub>p</sub>	13500 W <sub>p</sub>	13500 W <sub>p</sub>
1000 V	1000 V	1000 V
290 V to 800 V / 580 V	330 V to 800 V / 580 V	370 V to 800 V / 580 V
150 V / 188 V	150 V / 188 V	150 V / 188 V
15 A / 10 A	15 A / 10 A	15 A / 10 A
25 A / 15 A	25 A / 15 A	25 A / 15 A
2 / A:2; B:2	2 / A:2; B:2	2 / A:2; B:2
7000 W	8000 W	9000 W
7000 VA	8000 VA	9000 VA
3 / N / PE; 220 / 380 V	3 / N / PE; 220 / 380 V	3 / N / PE; 220 / 380 V
3 / N / PE; 230 / 400 V	3 / N / PE; 230 / 400 V	3 / N / PE; 230 / 400 V
3 / N / PE; 240 / 415 V	3 / N / PE; 240 / 415 V	3 / N / PE; 240 / 415 V
160 V to 280 V	160 V to 280 V	160 V ... 280 V
50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz ... +5 Hz
50 Hz / 230 V	50 Hz / 230 V	50 Hz / 230 V
10.2 A	11.6 A	13.1 A
1	1	1
0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited
3 / 3	3 / 3	3 / 3
98 % / 97.5 %	98 % / 97.6 %	98 % / 97.6 %
		
470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inch)
37 kg (81.6 lb)	37 kg (81.6 lb)	37 kg (81.6 lb)
-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)
40 dB(A)	40 dB(A)	40 dB(A)
1 W	1 W	1 W
Transformerless / Opticool	Transformerless / Opticool	Transformerless / Opticool
IP65	IP65	IP65
4K4H	4K4H	4K4H
100 %	100 %	100 %
SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal
Graphic	Graphic	Graphic
		
AS 4777.2:2015, CE, CEI 0-21:2016, C10/11:2012, DIN EN 62109-1, EN 50438 <sup>1</sup> , G59/3, G83/2, IEC 61727/MEA <sup>2</sup> , IEC 62109-2, NEN EN 50438, NRS 097-2-1, PPC, PPDS, RD 661/2007, RD 1699:2011, SI 4777, UTE C15-712-1, VDE0126-1-1, VDE AR-N 4105, VFR 2013, VFR 2014		
STP 7000TL-20	STP 8000TL-20	STP 9000TL-20

## Efficiency curve

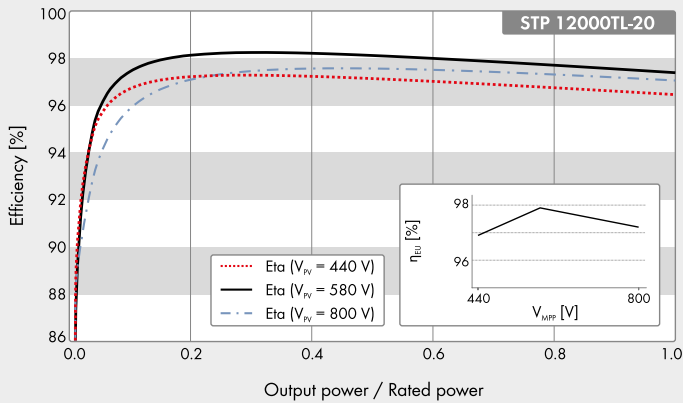

## Accessories



Power Control Module  
PWCBRD-10



RS485 interface  
485BRD-10

<sup>1</sup> Does not apply to all national appendices of EN 50438

<sup>2</sup> Only STP 9000TL-20

● Standard feature ○ Optional feature – Not available  
 Last updated: May 2017  
 Data at nominal conditions

Sunny Tripower 10000TL	Sunny Tripower 12000TL	
13500 W <sub>p</sub>	18000 W <sub>p</sub>	
1000 V	1000 V	
370 V to 800 V / 580 V	440 V to 800 V / 580 V	
150 V / 188 V	150 V / 188 V	
18 A / 10 A	18 A / 10 A	
25 A / 15 A	25 A / 15 A	
2 / A:2; B:2	2 / A:2; B:2	
10000 W	12000 W	
10000 VA	12000 VA	
3 / N / PE; 220 / 380 V	3 / N / PE; 220 / 380 V	
3 / N / PE; 230 / 400 V	3 / N / PE; 230 / 400 V	
3 / N / PE; 240 / 415 V	3 / N / PE; 240 / 415 V	
160 V to 280 V	160 V to 280 V	
50 Hz, 60 Hz / -5 Hz to +5 Hz	50 Hz, 60 Hz / -5 Hz to +5 Hz	
50 Hz / 230 V	50 Hz / 230 V	
14.5 A	17.4 A	
1	1	
0.8 overexcited to 0.8 underexcited	0.8 overexcited to 0.8 underexcited	
3 / 3	3 / 3	
98 % / 97.6 %	98.3 % / 97.9 %	
● ● / ● ● / ● / – ● I / III	● ● / ● ● / ● / – ● I / III	
470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	470 / 730 / 240 mm (18.5 / 28.7 / 9.5 inches)	
37 kg (81.6 lb)	38 kg / 84 lbs	
-25 °C to +60 °C (-13 °F to +140 °F)	-25 °C to +60 °C (-13 °F to +140 °F)	
40 dB(A)	40 dB(A)	
1 W	1 W	
Transformerless / Opticool	Transformerless / Opticool	
IP65	IP65	
4K4H	4K4H	
100 %	100 %	
SUNCLIX / spring-cage terminal	SUNCLIX / spring-cage terminal	
Graphic ○ / ● / ● ● / ○ ● / ○ / ○ / ○	Graphic ○ / ● / ● ● / ○ ● / ○ / ○ / ○	
AS 4777.2:2015, CE, CEI 0-21:2016, C10/11:2012, DIN EN 62109-1, EN 50438 <sup>1</sup> , G59/3, G83/2, IEC 61727/MEA <sup>2</sup> , IEC 62109-2, NEN EN 50438, NRS 097-2-1, PPC, PPDS, RD 661/2007, RD 1699:2011, SI 4777, UTE C15-712-1, VDE0126-1-1, VDE AR-N 4105, VFR 2013, VFR 2014		
STP 10000TL-20	STP 12000TL-20	

# SUNNY PORTAL



[www.SunnyPortal.com](http://www.SunnyPortal.com)  
Professional management,  
monitoring and presentation  
of PV plants

# SUNNY PLACES

[www.SunnyPlaces.com](http://www.SunnyPlaces.com)  
The community portal for  
private end customers





[www.SMA-Solar.com](http://www.SMA-Solar.com)  
Status: May 2017